

boway 52100 SG


Material Designation

Boway designation	boway 52100
UNS	C52100
EN	CuSn8
JIS	C5210
GB(China)	QSn8-0.3

Chemical Composition*

Sn	8	%
Cu	Rem.	

* Nominal composition

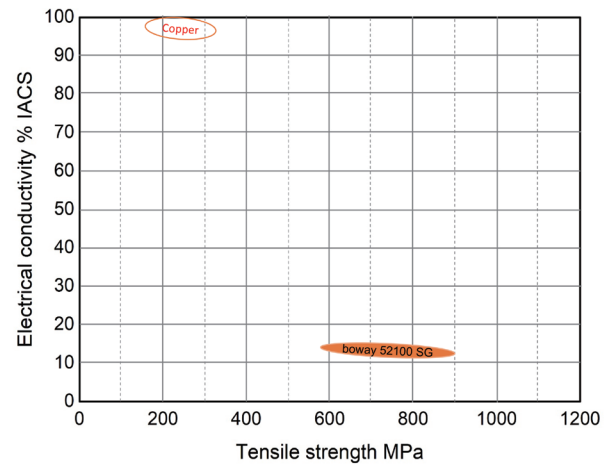

Application Target

Signal Connector	Very suitable
Power Connector	Suitable
Miniaturized Connector	Very suitable
Switch / Relay	Suitable
Semiconductor	Not recommend

Ideal for BTB connector, audio jack and other miniaturized connectors

Characteristics

Excellent bendability and fatigue performance combined with high strength. Good corrosion resistance and low sensitivity against stress corrosion cracking as well as excellent solderability. Low hot cracking tendency with resistance welding.

Fabrication Properties

Cold forming	Very good
Machining	Not suitable
Electroplating	Very good
Hot dip tinning	Very good
Laser welding	Good
Resistance welding	Good
Soft soldering	Good

Physical Properties*

Density	8.8	g/cm ³
Electrical conductivity @ 20°C	13	% IACS
	7.5	MS/m
Thermal conductivity @20°C	67	W/(m·K)
Specific heat capacity	0.377	J/(g·K)
Modulus of elasticity	115	GPa
Poisson's ratio	0.33	
Coefficient of thermal expansion**	18.2	10 ⁻⁶ /K

* Typical values at room temperature for reference.

** average value between 20-300°C

boway 52100 SG

Mechanical Properties

Temper	Tensile strength		Yield strength	Hardness*	Elongation
	MPa	ksi			
R590	590 - 705	85 - 102	≥540	185 - 235	≥20
R685	685 - 785	99 - 113	≥650	210 - 260	≥15
R735	735 - 835	106 - 121	≥700	230 - 270	≥9
R800	800 - 900	116 - 130	≥775	250 - 290	≥5

*For reference only

Bendability

bending thickness: ≤0.5 mm bending width : 10 mm

Temper	90° R/T		180° R/T	
	Good Way	Bad Way	Good Way	Bad Way
R590	0	0	0	1
R685	0	0.5	0.5	2
R735	0	2	1	3.5
R800	1	4	—	—

90° bend test According to EN ISO 7438, 180° bend test acc. to ASTM B820, shown values might show orange- peel, however no crack


Packaging

Standard coils with outside diameter up to 1300 mm,
 Traverse-wound coils with drum weight up to 500 kg.
 Multiple-coil up to 3 tons.

Dimensions available

Strip thickness 0.06 - 0.4 mm, other gauges on request.
 Strip width from 8.5 mm.
 Electroplated and Hot-dip tinned strip available.

Electrical Conductivity

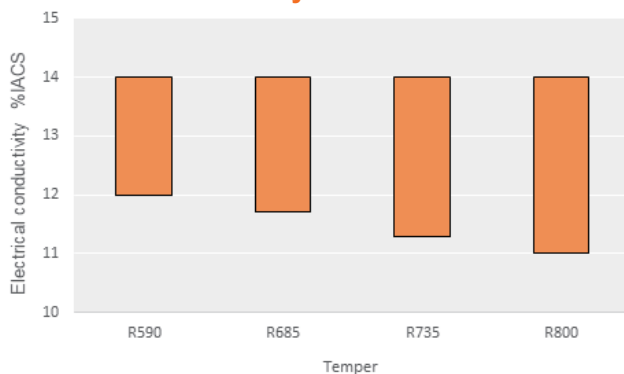

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10.000.000 load cycles under symmetrical alternate load without breaking. It depends on the temper selected and can be estimated typically by 1/3 of tensile strength. For solid solution fine grain materials fatigue strength might increase up to 0,5 * of tensile strength.

This datasheet is for your general information only and is not subject to revision. No claim can be derived from it unless there is evidence of intent or gross negligence. The data given is to our best knowledge, no warranty can be derived from the data provided. The given Info may not replace the customers own tests.