

boway 51900 SG

Material Designation

Boway designation	boway 51900 SG
UNS	C51900
EN	CuSn6
JIS	C5191
GB(China)	QSn6-0.2

Chemical Composition*

Sn	6	%
Cu	Rem.	


* Nominal composition

Application Target

Signal Connector	Suitable
Power Connector	Not recommend
Miniaturized Connector	Suitable
Switch / Relay	Suitable
Semiconductor	Not recommend

Fabrication Properties

Cold forming	Very good
Machining	Not suitable
Electroplating	Very good
Hot dip tinning	Very good
Laser welding	Good
Resistance welding	Good
Soft soldering	Very good

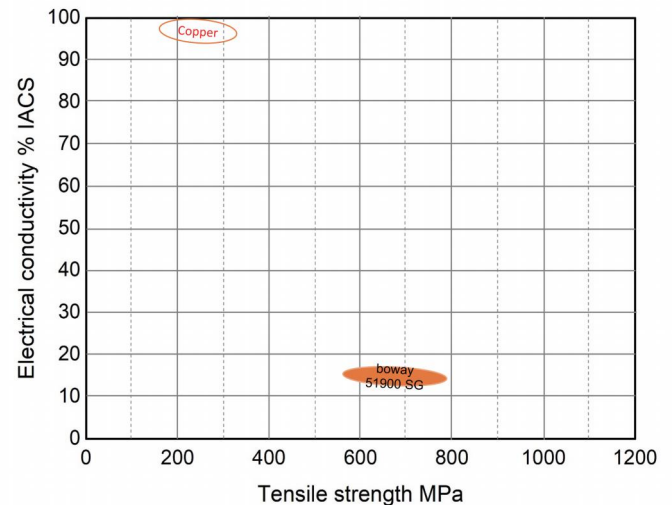

Characteristics

Very fine microstructure provides excellent bendability and fatigue performance combined with high strength. Good corrosion resistance and low sensitivity against stress corrosion cracking. Excellent solderability. Low hot cracking tendency with resistance welding.

Physical Properties*

Density	8.8	g/cm ³
Electrical conductivity @ 20°C	16	% IACS
	9	MS/m
Thermal conductivity @ 20°C	75	W/(m·K)
Specific heat capacity	0.377	J/(g·K)
Modulus of elasticity	120	GPa
Poisson's ratio	0.34	
Coefficient of thermal expansion**	18.5	10 ⁻⁶ /K

* Typical values at room temperature for reference.

** average value between 20-300°C

boway 51900 SG

Mechanical Properties

Temper	Tensile strength		Yield strength	Hardness*	Elongation
	MPa	ksi			
R550	550 - 650	79 - 94	≥ 500	170 - 230	≥ 16
R670	670 - 780	97 - 113	≥ 660	200 - 260	≥ 7

*For reference only

Bendability bending thickness: ≤0.4 mm, bending width: 10 mm

Temper	90° R/T		180° R/T	
	Good Way	Bad Way	Good Way	Bad Way
R550	0	0	0	1
R670	1	2	1.5	3

90° bend test According to EN ISO 7438, 180° bend test acc. to ASTM B820, shown values might show orange-peel, however no crack.


Packaging

Standard coils with outside diameter up to 1300 mm,
 Traverse-wound coils with drum weight up to 500 kg.
 Multiple-coil up to 3 tons.

Dimensions available

Strip thickness 0.06 - 0.4 mm, other gauges on request.
 Strip width from 8.5 mm.
 Electroplated and Hot-dip tinned strip available.

Electrical Conductivity

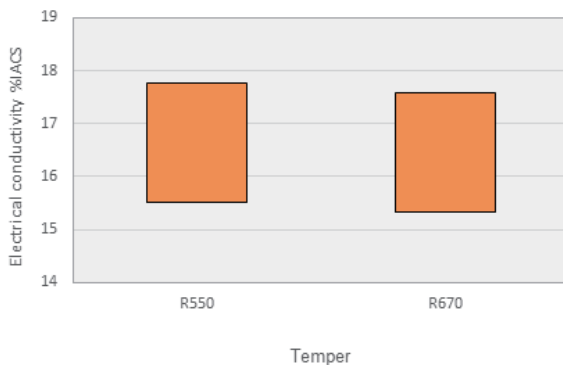

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10.000.000 load cycles under symmetrical alternate load without breaking. It depends on the temper selected and can be estimated typically by 1/3 of tensile strength. For solid solution fine grain materials fatigue strength might increase up to 0,5 * of tensile strength.