

boway 19920

Material Designation

Boway designation	boway 19920
UNS	C19920
EN	-
JIS	-
GB (China)	-

Chemical Composition*

Ti	2.5-3.5	%
Others	≤1	%
Cu	Rem.	

* Nominal composition


Application Target

Signal Connector	Very suitable
Power Connector	Not suitable
Miniaturized Connector	Very suitable
Switch / Relay	Suitable
Semiconductor	Not suitable

Ideal for Signal Connector and spring.

Fabrication Properties

Cold forming	Good
Machining	Not suitable
Electroplating	Good
Hot dip tinning	Good
Laser welding	Good
Resistance welding	Good
Soft soldering	Good

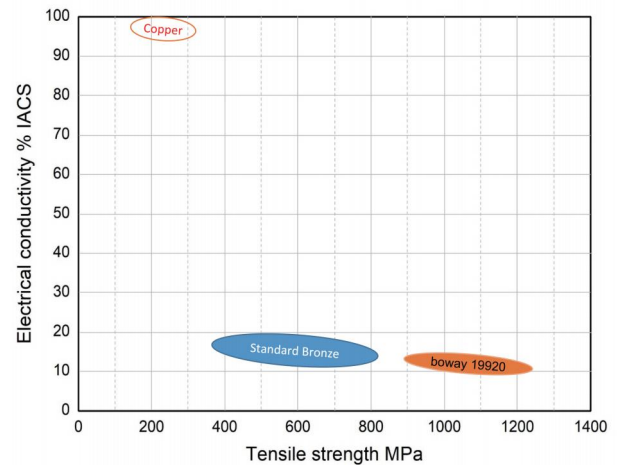

Characteristics

boway 19920 alloy is a Cu-Ti based alloy. The alloy is beryllium-free combining very high strength with excellent bending properties, superb thermal stress relaxation properties and high fatigue resistance.

Physical Properties*

Density	8.66	g/cm ³
Electrical conductivity @ 20°C	12	%IACS
conductivity @ 20°C	7	MS/m
Thermal conductivity @20°C	50	W/(m·K)
Specific heat capacity	0.39	J/(g·K)
Modulus of elasticity	120	GPa
Poisson's ratio	0,34	
Coefficient of thermal expansion**	17.76	10 ⁻⁶ /K

* Typical values at room temperature for reference.

** average value between 20-300°C

boway 19920

Mechanical Properties

Temper	Tensile strength		Yield strength	Hardness*	Elongation
	MPa	ksi			
R880(H)	880 - 1000	128 - 145	800 - 900	280-320	10
R920(EH)	920 - 1050	133 - 152	850 - 950	290-330	6
R960(SH)	960 - 1100	139 - 160	900 - 1000	300-340	3
R1000(ESH)	1000 - 1150	145 - 167	950 - 1050	310-350	2
R1050(XSH)	1050-1200	152 - 174	1000-1100	320-360	1
R1100(GSH)	1100-1250	160 - 181	1050-1200	330-370	-

*For reference only

Bendability bending thickness: ≤ 0.20 mm, bending width: 10 mm

Temper	90° R/T		180° R/T	
	Good Way	Bad Way	Good Way	Bad Way
R880(H)	0	0	--	--
R920(EH)	0	0.5	--	--
R960(SH)	0	1	--	--
R1000(ESH)	--	--	--	--
R1050(XSH)	--	--	--	--
R1100(GSH)	--	--	--	--

90° bend test According to EN ISO 7438, 180° bend test acc. to ASTM B820, shown values might show orange-peel, however no crack

Packaging

Standard coils with outside diameter up to 1300 mm.


Dimensions available

Strip thickness 0.06-0.20 mm, other gauges on request

Strip width from 8.5 mm

Electroplated and Hot-dip tinned strip available

Electrical Conductivity

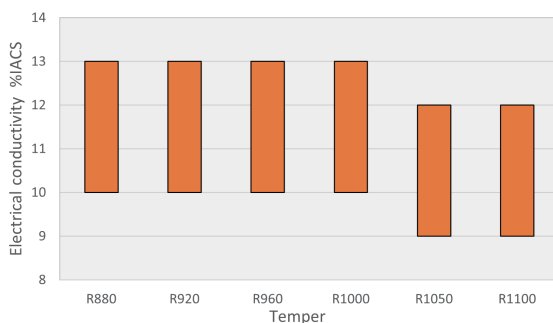

Fatigue Strength

The fatigue strength is defined as the maximum bending stress amplitude which a material withstands for 10.000.000 load cycles under symmetrical alternate load without breaking. It depends on the temper selected and can be estimated typically by 1/3 of Tensile strength. For solid solution fine grain materials fatigue strength might increase up to 0,5 * of Tensile strength.

This datasheet is for your general information only and is not subject to revision. No claim can be derived from it unless there is evidence of intent or gross negligence. The data given is to our best knowledge, no warranty can be derived from the data provided. The given info may not replace the customers own tests.